


SOLYX® Glass Finishes

SX-1910 Removable - Construction Black

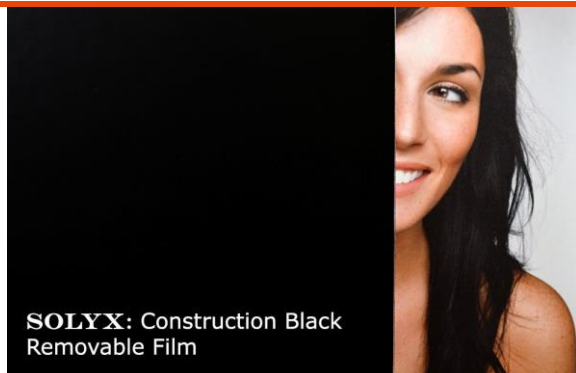

Product Details

SOLYX® SX-1910 Construction Black - This is a flexible opaque black vinyl film coated with a removable pressure sensitive acrylic adhesive and backed with an ultra smooth clear polyester release liner.

NOTE:

Application environments and certain surfaces such as vinyl, glass, acrylic, styrene, and polycarbonate can cause increased adhesion and adhesive transfer. We recommend that all surfaces be tested for compatibility and removability.

Durability

OUTDOOR: 2-5 years based on vertical exposure and depending on magnitude of UV exposure

INDOOR: 10 years

Installation and Warranty

Installation

Installation should be in accordance with manufacturer's installation instructions.

Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are available through qualified Installing Dealers, Distributors or from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC
1-888-657-5224
www.decorativefilm.com

Product Description

SOLYX® SX-1910 Construction Black is a removable, high grade opaque vinyl film designed for temporary light and visibility blocking applications to hide interior construction. Suitable for use in decorative design applications including shop windows, glass doors etc.

Specifications

Product Code	Construction Black
Product Family	Temporary
Film Type	Vinyl
Adhesive Type	Pressure-sensitive
Usage	Interior or Exterior
Available Width(s)	60" (1524mm)
Full Roll Length	200 linear feet
Thickness	4 mil
Shading Coefficient	0.41
Visible Light Reflection	3%
Visible Light Transmission	8%
UV Transmission	0%
Solar Heat Rejected	78%
Solar energy absorbed	54%
Infra-Red Transmission	11%

Product Construction

Face Film 4 mil vinyl

Adhesive Removable - solvent-based clear acrylic, Pressure-sensitive

Release Liner 1.5 mil polyester