


SOLYX® Glass Finishes

SX-3130 White 70 Diffuser

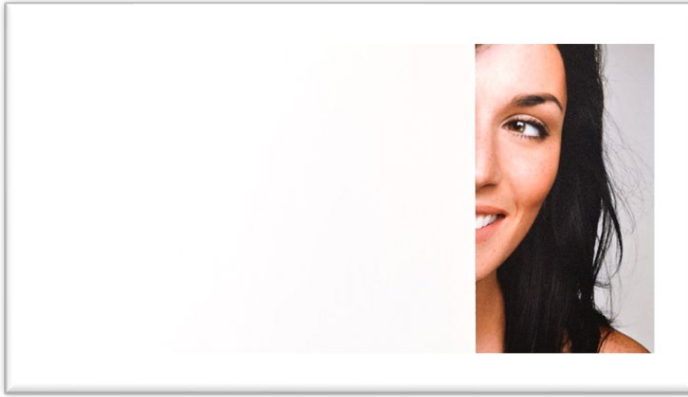

Product Details

SOLYX® SX-3130 White 70 Diffuser is a durable, dimensionally stable cast vinyl supplied on a frosted release liner.

Specifications

Product Code	SX-3130
Product Family	Frosted
Film Type	Cast Vinyl
Adhesive Type	Pressure-Sensitive
Usage	Interior or Exterior
Available Width(s)	48", 60"
Full Roll Length	100 linear feet (30.5m)
Thickness	2 mil
Visible Light Transmission	8%
UV Transmission	<1%
Solar energy absorbed	31%

Product Construction

Face Film

2.5 mil Cast Vinyl

Adhesive

Solvent-Based Clear Acrylic, Pressure-Sensitive

Release Liner

3 mil, Matte Polyester

*This printable and plottable film is provided for general use, but its suitability for specific applications may vary. Users are advised to conduct thorough testing with their equipment and under their specific conditions to determine its compatibility and performance for their intended purposes. The manufacturer makes no guarantees, expressed or implied, regarding the fitness of this film for any particular printing or plotting application. Usage without prior testing is at the user's discretion and risk. It is the responsibility of the user to ensure that the film meets their specific requirements before full-scale production or critical applications.

Product Description

SOLYX® SX-3130 White 70 Diffuser is a durable, dimensionally stable, cast vinyl, light diffusing film that gives the appearance of white etched glass. This film is supplied with a plottable release liner compatible with most UV, Latex, and Solvent printers.

Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

Media* Use and Warranty

Print

Suitable for most UV, Latex, and Solvent printing.

Plotting and Masking

RTap AT65 is our recommended masking tape when plotting SX-3130

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of interior installation and three (3) years for exterior installation. See warranty information for specific details. 9 year expected life for exterior applications

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC

1-888-657-5224

www.decorativefilm.com