


SOLYX
UltraGreen® Glass Finishes
SX-8783-UG Eco Sand Blast

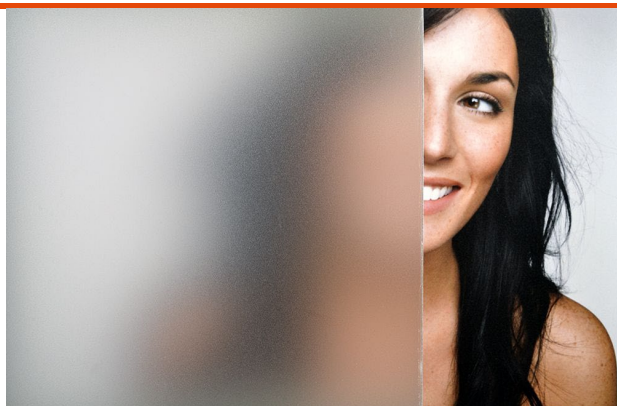

Product Description

SOLYX® SX-8783-UG Eco Sand Blast

Introducing **UltraGreen**, an innovative collection of decorative privacy window films utilizing advanced, VOC-free coating technology and eco-friendly PVC-free materials to create an environmentally responsible product with exceptional performance.

Specifications

Product Code	SX-8783-UG
Product Family	Frosted & Design Free
Film Type	Polycarbonate
Adhesive Type	Pressure-Sensitive
Usage	Interior and Exterior
Available Width(s)	54"
Full Roll Length	100 linear feet
Thickness	3 mil
Visible Light Transmission	54%
UV Transmission	23%
Infra-Red Transmission	48%

Product Construction

Face Film

3 mil Polycarbonate

Adhesive

Permanent, Pressure-Sensitive

Release Liner

3 Mil Liner

Product Details

SOLYX® **SX-8783-UG Eco Sand Blast** is a translucent, lightly textured film made from durable, dimensionally stable polycarbonate. Manufactured with a silicone coated liner which protects the clear pressure-sensitive adhesive, it is recommended for application to glass, acrylic and polycarbonate sheeting. This film is ideal for privacy, decorative or architectural applications.

Flammability Rating

Horizontal Burn (Flame Spread) ASTM D-635 inch Less than 1.0
UL 94 Rating UL 94 UL Classification V-O
Class A 0 -25 Flame Spread Index 0 -450 Smoke Developed Index

Features

Service Temperature Range -40°F to +225°F
Adhesive Thickness – 1.3-1.7 mils
Shelf Life (@ 73°F, 50% RH) 2 years
Static Shear (1" x 1" x 1000 grams) >200 hours
Outdoor Life of Film 5 years. Indoor 10 years
UV Block 100% 200 nm – 360 nm 98% 360 nm – 400 nm

Chemical Resistance

Distilled Water (24 hr) No Effect
Detergent (24 hr) No Effect
10% HCl (10 min) No Effect
10% Ammonium Hydroxide (10 min) No Effect
Gasoline (1 hr) No Effect

Installation and Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years interior from the date of installation and (1) year for exterior applications. Life expectancy is 3-5 years for exterior applications. See warranty information for specific details. The warranty does not apply to film problems caused by defective application.

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC. Samples submitted upon request.

Contact Information

Decorative Films, LLC

1-888-657-5224

www.decorativefilm.com

Country of Origin: Made in the USA

