


SOLYX
UltraGreen® Glass Finishes
SX-932932-UG Frosted Squares

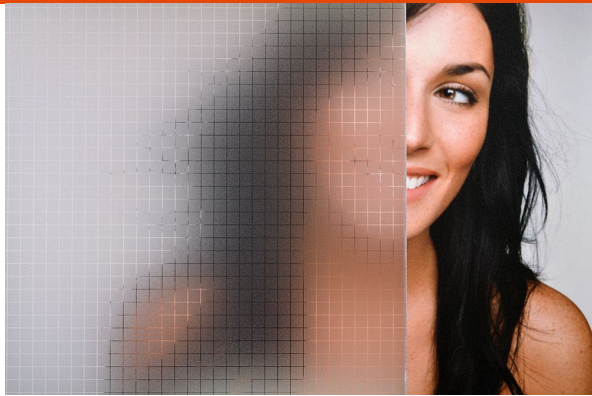

Product Details

SOLYX® SX-932932-UG Frosted Squares is a polyester film with a 9/32" frosted square pattern. Manufactured with a silicone coated liner which protects the clear, pressure-sensitive adhesive, this film is designed for application to interior glass, single- or double-pane, and exterior-facing glass. It is perfect for privacy, decorative, or architectural applications.

Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

Installation and Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used in installing window tinting films.

Warranty

This **SOLYX®** product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC
 1-888-657-5224
www.decorativefilm.com

Product Description

SOLYX® SX-932932-UG Frosted Squares

Introducing **UltraGreen**, an innovative collection of decorative privacy window films utilizing advanced, VOC-free coating technology and eco-friendly PVC-free materials to create an environmentally responsible product with exceptional performance.

Specifications

Product Code	SX-932932-UG
Product Family	Geometric
Film Type	Polyester
Adhesive Type	Pressure-Sensitive
Usage	Interior
Available Height	48"
Full Roll Length	25 linear feet
Thickness	2 mil
Shading Coefficient	0.55
Visible Light Transmission	55%
UV Transmission	33%
Total Solar Energy Rejected	38%
Solar Energy Absorbed	25%

Product Construction

Face Film

2 mil Polyester

Adhesive

Clear, Pressure-Sensitive

Release Liner

Silicone Coated