


## SOLYX® Glass Finishes

### SOLYX: SX-C362 Dot Screen 16

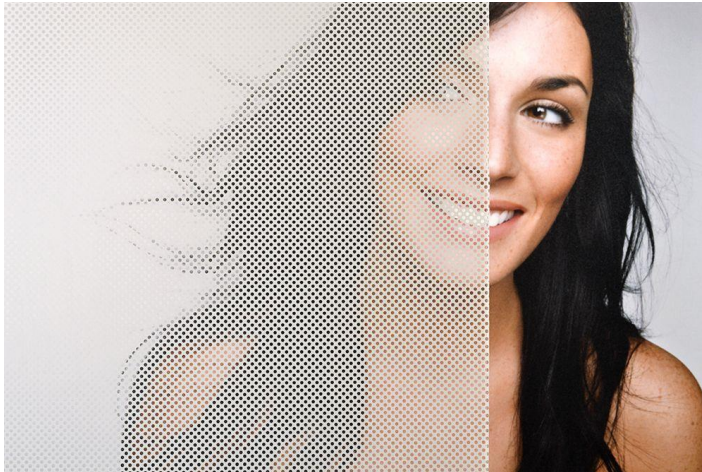

#### Product Details

**SOLYX: SX-C362 Dot Screen.** SX-C362 Dot Screen 16. 1/16" Small Clear dots design providing semi-obscurety.. Recommended for application to interior and exterior glass (inside surface). Made of durable optically clear PET film with a printed pattern. Total nominal thickness is 2 mil. Supplied with a silicone liner, which protects the clear, pressure-sensitive adhesive, and fitted using the same tools and techniques for window films.

#### Fire Rating

Horizontal Burn (Flame Spread) ASTM D-635 inch Less than 1.0  
UL 94 Rating UL 94 Classification V-O  
Class A 0 -25 Flame Spread Index 0 -450 Smoke Developed Index

#### LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24)

#### Product Description

**SOLYX: SX-C362 Dot Screen.** SX-C362 Dot Screen 16. 1/16" Small Clear dots design with a white background providing semi-obscurety

#### Specifications

|                             |                    |
|-----------------------------|--------------------|
| Product Code                | SX-C362            |
| Product Family              | Patterned Privacy  |
| Film Type                   | PET                |
| Adhesive Type               | Pressure-sensitive |
| Usage                       | Interior           |
| Available Width(s)          | 48"                |
| Full Roll Length            | 50Ft               |
| Thickness                   | 2.5 mil            |
| Visible Light Transmission  | 43%                |
| UV Transmission             | 1%                 |
| Infra-Red Transmission      | 60%                |
| Total Solar Energy Rejected | 32%                |

#### Product Construction

##### Face Film

2 mil PET

##### Adhesive

Clear, Pressure-sensitive

##### Release Liner

Silicone

#### Installation and Warranty

##### Installation

Installation should be in accordance with manufacturer's installation instructions.

##### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation.

See Warranty information for specific details.

#### Product Distribution and Contact Information

##### Distribution

SOLYX® Decorative Films are available through qualified Installing Dealers, Distributors or from Decorative Films, LLC.

Samples submitted upon request.

##### Contact Information

Decorative Films, LLC  
1-888-657-5224  
[www.decorativefilm.com](http://www.decorativefilm.com)