


## SOLYX® SX-SC553 Asher Static Cling

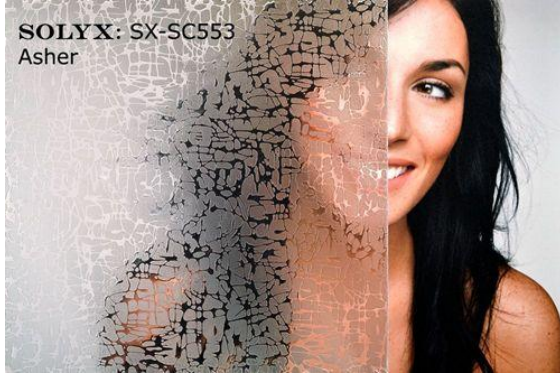

### Product Detail

**SOLYX® SX-SC553: Asher Sand Static Cling** Films are recommended for application to interior glass and exterior glass (inside surface) or plastics and polycarbonate sheets. This film is made of durable Static Cling polypropylene film with an embossed textured surface and clear removable release liner. The total nominal thickness is between 7 and 9 mils.

### Fire Rating

The product was tested according to ASTM E84 and is classified as Class A, as defined in NFPA 101, Life Safety Code®.

### Product Description

#### **SOLYX SX-SC553: Asher Static Cling**

A fully removable and reusable film ideal for semi-obscuring view and providing excellent light transmission.

#### Specifications

Product Code	SX-SC553
Product Family	Static Cling/Frosted Patterns
Film Type	Polypropylene
Adhesive Type	Non Adhesive Static Cling
Usage	Interior or Exterior
Available Width(s)	36"
Length	164 linear feet(std Rolls)
Thickness	7 mil
IR Transmission	35%
Visible Light Transmission (%)	15%
UV Transmission (%)	1%

### Installation and Warranty

#### Installation

Installation should be in accordance with manufacturer's installation instructions. Installed using the same methods for installing window films.

#### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See Warranty information for specific details.

### Product Distribution and Contact Information

#### Distribution

SOLYX® Decorative Films are available through qualified Installing Dealers, Distributors or from Decorative Films, LLC

Samples submitted upon request.

#### Contact Information

Contact Decorative Films, LLC at 1-888-657-5224 or [www.decorativefilm.com](http://www.decorativefilm.com)

### Product Construction

**Face Film:** 7 mil Polypropylene

**Adhesive:** NON ADHESIVE Static Cling

**Liner:** Transparent Synthetic