


## SOLYX® Glass Finishes

### SX-SC555 Titanium Sand

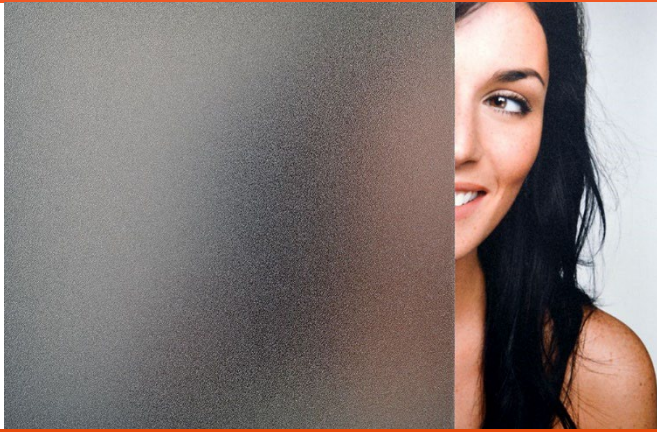

#### Product Description

SOLYX® SX-SC555 Titanium Sand is a translucent, colored static cling film that simulates sandblasted glass, providing obscured visibility and good light transmission.

#### Specifications

|                             |                           |
|-----------------------------|---------------------------|
| Product Code                | SX-SC555                  |
| Product Family              | Frosted                   |
| Film Type                   | Polypropylene             |
| Adhesive Type               | Non-Adhesive Static Cling |
| Usage                       | Interior                  |
| Available Width(s)          | 35.5"                     |
| Thickness                   | +/-8 mil                  |
| IR Transmission             | 24%                       |
| Visible Light Transmission  | 19%                       |
| UV Transmission             | 4%                        |
| Absorption                  | 45%                       |
| Total Solar Energy Rejected | 56%                       |

#### Product Construction

##### Face Film

8 mil Polypropylene

##### Adhesive

Non-Adhesive Static Cling

##### Release Liner

Transparent Synthetic

#### Product Details

SOLYX® SX-SC555 Titanium Sand is a translucent, textured, dark bronze static cling film that simulates sandblasted glass. Manufactured from durable polypropylene, it is supplied with a clear release liner and is recommended for application to interior glass and the inside surface of exterior glass. This fully removeable and reusable non-adhesive film is ideal for privacy, decorative, or architectural applications to reduce glare and provide obscured visibility and shading.

#### Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

#### LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

#### Installation and Warranty

##### Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

##### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

#### Product Distribution and Contact Information

##### Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

##### Contact Information

Decorative Films, LLC

1-888-657-5224

[www.decorativefilm.com](http://www.decorativefilm.com)