


## SOLYX® Glass Finishes

### SXB-172 Prose Sand Blast

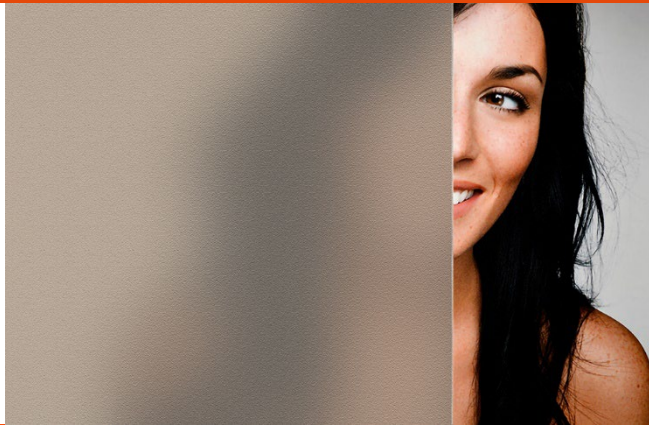

#### Product Description

SOLYX® SXB-172 Prose Sand Blast is a translucent, embossed, vinyl film that simulates colored sandblasted glass. This film is ideal for obscuring direct visibility while allowing excellent light transmission.

#### Specifications

|                            |                    |
|----------------------------|--------------------|
| Product Code               | SXB-172            |
| Product Family             | Frosted            |
| Film Type                  | Vinyl              |
| Adhesive Type              | Pressure-Sensitive |
| Usage                      | Interior           |
| Available Width(s)         | 48"                |
| Full Roll Length           | 100 linear feet    |
| Thickness                  | 3 mil              |
| Visible Light Transmission | 34%                |
| UV Rejection               | 99%                |
| IR Rejection               | 32%                |

#### Product Construction

##### Face Film

5 mil Polymeric Vinyl

##### Adhesive

Clear, Pressure-Sensitive

##### Release Liner

3 Mil Plottable

#### Product Details

SOLYX® SXB-172 Prose Sand Blast is a translucent, embossed, vinyl film that simulates colored sandblasted glass. Manufactured with a synthetic liner which protects the clear, pressure-sensitive adhesive. This film is ideal for privacy, decorative, or architectural applications.

#### Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

#### LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

#### Safety Rating

Meets:

ANSI Z97.1-1984

16 CFR 1201 U.S.G.S. Category II: Break Strength 100PLI

#### Installation and Warranty

##### Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

##### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

#### Product Distribution and Contact Information

##### Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

##### Contact Information

Decorative Films, LLC

1-888-657-5224

[www.decorativefilm.com](http://www.decorativefilm.com)