


## SOLYX® Glass Finishes SXEG-4848 Stained Glass Flowers

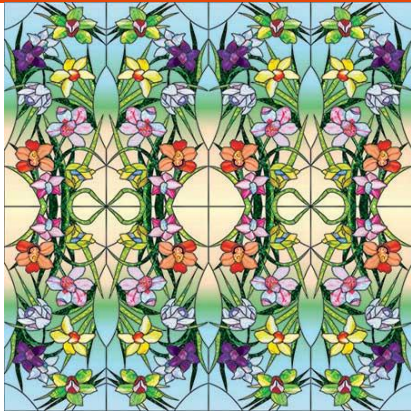

### Product Details

#### SOLYX® SXEG-4848 Stained Glass Flowers Window Film

A beautiful decorative film for glass surfaces. Perfect for home interior remodeling, office transformations, and adding privacy and color to any window. This quality polyester film is easy to install resulting in a professional appearance.

Films are recommended for application to interior and exterior glass (inside surface). Made of durable polyester and a decorative surface. Supplied with a silicone liner, which protects the clear, pressure-sensitive adhesive, and applied using the same tools and techniques for window films.

#### Pattern Details:

The image above shows TWO horizontal 24" pattern repeats side by side. 47 3/4" is the Vertical pattern repeat

#### Fire Rating

The product was tested according to ASTM E84 and is classified as Class A, as defined in NFPA 101, Life Safety Code®.

### Installation and Warranty

#### Installation

Installation should be in accordance with manufacturer's installation instructions.

#### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation.

See Warranty information for specific details.

### Product Distribution and Contact Information

#### Distribution

SOLYX® Decorative Films are available through qualified Installing Dealers, Distributors or from Decorative Films, LLC.

Samples submitted upon request.

#### Contact Information

Decorative Films, LLC  
1-888-657-5224  
www.decorativefilm.com

### Product Description

**SOLYX® SXEG-4848 Stained Glass Flowers.** A beautifully colored, stained glass pattern. Translucent. Excellent light transmission.

#### Privacy Level 3 - More Private

Little Visibility, offers most privacy with good light transmission.

#### Specifications

Product Codes	SXEG-4848
Product Family	Stained Glass
Film Type	Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior
Available Width(s)	24", 48"
Thickness	2 mil
Visible Light Transmission	65%-82%
UV Transmission	2%
Total Solar Energy Absorbed	Average -35%
U Value	Average - 1.75
Shading Coefficient	Average -.95
Reflectance	0 – 8%%
Total Solar Energy Rejected	Average - 35%

### Product Construction

#### Face Film

2 Mil polyester

#### Adhesive

Clear, Pressure-sensitive, Removable

#### Release Liner

Silicone