


SOLYX® Glass Finishes

SXGF-0197 Light Etch

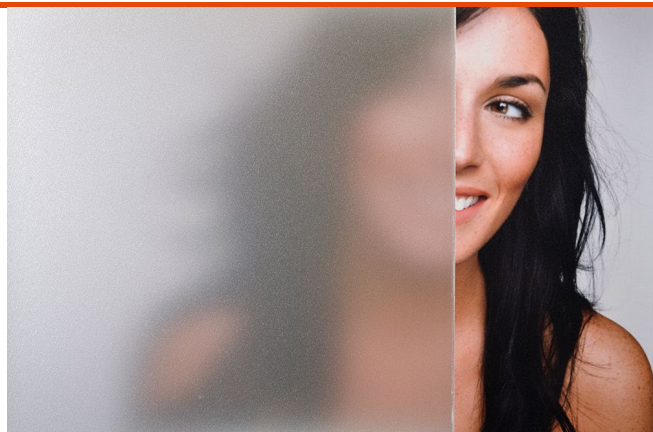

Product Description

SOLYX® SXGF-0197 Light Etch is a translucent vinyl film designed to give the appearance of acid-etched glass with a soft, frosted appearance and a subtle metallic sparkle. It is ideal for providing semi-obscured visibility while allowing excellent light transmission.

Specifications

Product Code	SXGF-0197
Product Family	Frosted
Film Type	Vinyl
Adhesive Type	Pressure-Sensitive
Usage	Interior or Exterior
Available Width(s)	24", 36", 60"
Full Roll Length	100 linear feet (30.5m)
Thickness	3 mil
Visible Light Reflection	65%
Visible Light Transmission	53%
UV Transmission	10%
Infra-Red Transmission	52%

Product Construction

Face Film

3 mil Vinyl

Adhesive

Solvent-Based, Clear, Acrylic, Pressure-Sensitive

Release Liner

1.5 mil Polyester

Product Details

SOLYX® SXGF-0197 Light Etch is a translucent vinyl film designed to give the appearance of acid-etched glass with a soft, frosted appearance and a subtle metallic sparkle. This flexible polymeric film is coated with a solvent-based, acrylic, pressure-sensitive adhesive and a 1.5 mil polyester liner. Recommended for application to interior and exterior glass, it is perfect for privacy, decorative, or architectural applications including shop windows, glass doors, and other glass-like surfaces.

Durability

OUTDOOR: 7 years based on vertical exposure and depending on magnitude of UV exposure

INDOOR: 15 years

Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

Installation and Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years interior from the date of installation and (1) year for exterior applications. Life expectancy is 3-5 years for exterior applications. See warranty information for specific details. The warranty does not apply to film problems caused by defective application.

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC

1-888-657-5224

www.decorativefilm.com