


SOLYX® Glass Finishes

SXWF-SSO Satin Silver Opaque

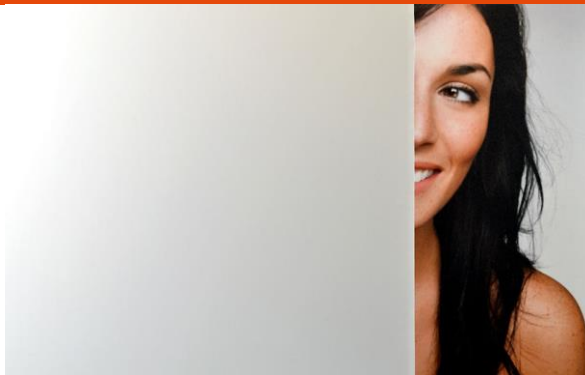

Product Details

SOLYX® SXWF-SSO Satin Silver Opaque is a durable polyester film with a satin aluminum-looking surface and a silver reflective finish on the adhesive side. Supplied with a silicone coated liner which protects the clear, pressure-sensitive adhesive, it is designed for application to interior or exterior glass, single- or double-pane. This film is ideal for privacy, decorative, solar control, or architectural applications.

NOTE: When this film is backlit by direct sunlight, some inherent pinholes may be visible.

Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

Installation and Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

Warranty

This **SOLYX®** product will be free from defects in material and manufacture for a period of ten (10) years from the date of installation. Exterior applications have a three (3) year warranty. See warranty information for specific details.

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC
1-888-657-5224
www.decorativefilm.com

Product Description

SOLYX® SXWF-SSO Satin Silver Opaque has a satin aluminum-looking surface and a silver reflective finish on the adhesive side. This excellent privacy film is also ideal for heat and UV rejection.

Specifications

Product Code	SXWF-SSO
Product Family	Design-Free
Film Type	Polyester
Adhesive Type	Pressure-Sensitive
Usage	Interior or Exterior
Available Width(s)	60" (1524mm)
Full Roll Length	100 linear feet (30.5m)
Thickness	4 mil/2Ply
Shading Coefficient	0.24
Visible Light Transmission	0%
UV Transmission	0%
Total Solar Reflectance	48%
Total Solar Absorbance	35%
Glare Reduction	92%
Total Solar Energy Rejected	66%

Product Construction

Face Film

4 mil Polyester

Adhesive

Clear, Pressure-Sensitive

Release Liner

Silicone Coated