


## SOLYX® Glass Finishes

### SXWF-WF White Frost

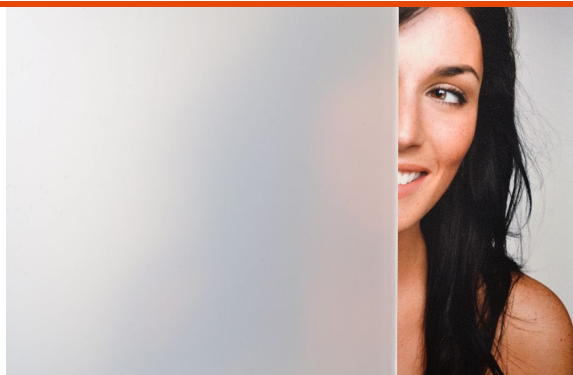

#### Product Description

SOLYX® SXWF-WF White Frost is a translucent frosted polyester film with a very light texture. It is ideal for obscuring direct visibility while allowing good light transmission.

#### Specifications

|                             |                         |
|-----------------------------|-------------------------|
| Product Code                | SXWF-WF                 |
| Product Family              | Frosted                 |
| Film Type                   | Polyester               |
| Adhesive Type               | Pressure-Sensitive      |
| Usage                       | Interior or Exterior    |
| Available Width(s)          | 48", 60"                |
| Full Roll Length            | 100 linear feet (30.5m) |
| Thickness                   | 2 mil                   |
| Shading Coefficient         | 0.82                    |
| Visible Light Transmission  | 31%                     |
| UV Transmission             | 24%                     |
| Solar Heat Reflection       | 18%                     |
| Solar Energy Absorbed       | 20%                     |
| Glare Reduction             | 28%                     |
| Infra-Red Transmission      | 41%                     |
| Total Solar Energy Rejected | 38%                     |

#### Product Construction

##### Face Film

2 mil Polyester

##### Adhesive

Clear, Pressure-Sensitive

##### Release Liner

Silicone Coated

#### Product Details

SOLYX® SXWF-WF White Frost is a translucent frosted polyester film with a very light texture. Manufactured with a silicone coated liner which protects the clear, pressure-sensitive adhesive, this film is designed for application to interior glass, single- or double-pane, and exterior facing-glass as well as to exterior glass. It is ideal for privacy, decorative, or architectural applications.

#### Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

#### LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

#### Installation and Warranty

##### Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

##### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years interior from the date of installation and (1) year for exterior applications. Life expectancy is 3-5 years for exterior applications. See warranty information for specific details. The warranty does not apply to film problems caused by defective application.

#### Product Distribution and Contact Information

##### Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

##### Contact Information

Decorative Films, LLC

1-888-657-5224

[www.decorativefilm.com](http://www.decorativefilm.com)

MADE IN THE USA

