


SOLYX
UltraCool®

UltraCool®-IR8360 IR and UV Blocking Solar Film

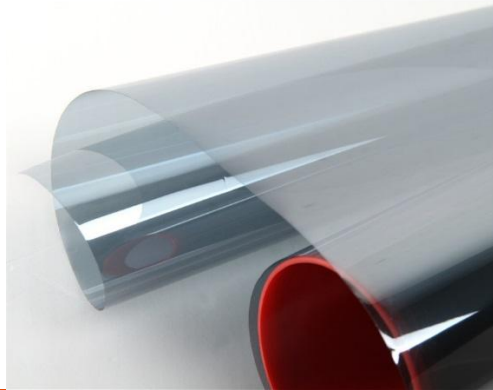

Product Description

SOLYX® UltraCool-IR8360 IR and UV Blocking Solar Film is a premium grade, very light blue film that provides high visibility and extremely effective protection against UV rays and infrared heat.

Specifications

Product Code	UltraCool-IR8360
Product Family	Specialized Function
Film Type	Polyester
Adhesive Type	Pressure-Sensitive
Usage	Interior
Available Width(s)	60"
Full Roll Length	100 linear feet
Thickness	2 mil
Shading Coefficient	0.54
Visible Light Transmission	77%
Glare Reduction	16%
UV Transmission	1%
Reflectance	3.8%
Solar Absorption	34%
IR Rejection	89%
Total Solar Energy Rejected	51%

Product Construction

Face Film

2 mil Polyester

Adhesive

Clear, Pressure-Sensitive

Release Liner

Silicone Coated

Product Details

SOLYX® UltraCool-IR8360 IR and UV Blocking Solar Film is a premium grade, Nano Ceramic, polyester film with spectrally selective IR blocking properties. Manufactured with a silicone coated liner, which protects the clear, pressure-sensitive adhesive, it is ideal for heat and UV fade control.

Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

Installation and Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. It is applied using the same tools and techniques used for installing window tinting films.

Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are manufactured by Decorative Films LLC and are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC

1-888-657-5224

www.decorativefilm.com

UltraCool-IR8360 transmission curve



Nanometers: 200 300 400 500 600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300 2400 2500