


SOLYX UltraSafe®

UltraSafe-WMmax White Matte Max Safety Film

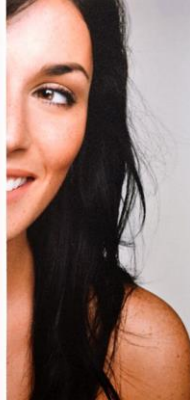

Product Details

SOLYX® UltraSafe-WMmax White Matte Max Safety Film combines one layer of 2 mil polyester together with another layer of 3 mil polyester giving it a very strong form of protection for glass in case of impact or vandalism. Part of its strength is not only its thickness, but its extremely aggressive adhesive that molecularly bonds the film with the glass. Included in the construction is an interior layer of ultra violet screening that allows for 99% rejection of damaging ultra violet rays. This film is ideal for providing obscured visibility, good light transmission, and strength to glass surfaces.

Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

Code Compliance Test Data

NOA 13-0408.01

Successfully passes:

CPSC 16 CFR 1201 building code.

Air Infiltration Test, per FBC, TAS 202-94

Uniform Static Air Pressure Test, Loading per: FBC, TAS 202-94 Water Resistance Test, per FBC, TAS 202-94

Small Missile Impact Test per FBC, TAS 201-94 Cyclic Wind Pressure Loading per FBC, ASTM E 1886

Successfully passes all weathering tests:

ASTM D1929-10, ASTM D2843-10, ASTM D635-10, ASTM G155-04a, ASTM D638-10

Installation and Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. It is applied using the same tools and techniques used for installing window tinting films.

Warranty

This **SOLYX®** product will be free from defects in material and manufacture for a period of ten (10) years from the date of installation. See warranty information for specific details.

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are manufactured by Decorative Films LLC and are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC

1-888-657-5224

www.decorativefilm.com

Product Description

SOLYX® UltraSafe-WMmax White Matte Max Safety Film is a premium grade translucent white matte safety and security polyester film with a pressure-sensitive safety adhesive.

Specifications

Product Code	UltraSafe-WMmax
Product Family	Specialized Function
Film Type	Polyester
Adhesive Type	Pressure-Sensitive
Usage	Interior
Available Width(s)	60"
Full Roll Length	100 linear feet (30.5m)
Thickness	2 ply / 5 mil
Visible Light Transmission	29%
UV Transmission	<1%
IR Transmission	43%
Total Solar Absorbance	22%
Tensile Strength psi	32,500
Yield Strength psi	12,000
Break Strength lbs/inch TD/MD	182/217
Longitude Elongation at Break	>100%
Peel Strength g/inch	2750
Puncture Resistant Load lbs	9320

Product Construction

Face Film

5 mil Polyester

Adhesive

Clear, Pressure-Sensitive

Release Liner

Silicone Coated