


SOLYX® Glass Finishes SX-SC563 Overlays

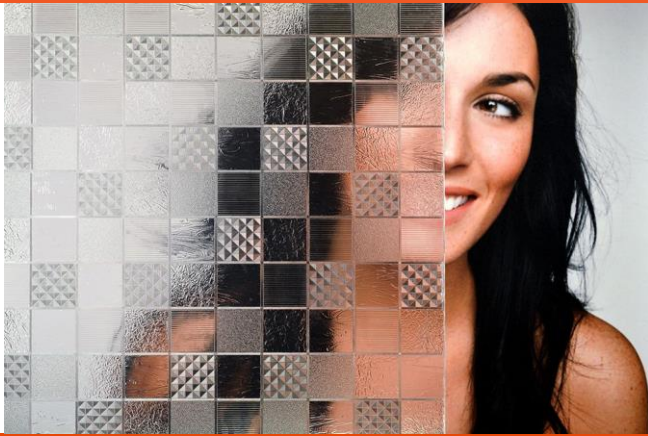

Product Details

SOLYX® SX-SC563 Overlays is a translucent static cling film with a geometric pattern of 15/16" squares of varying textures. Made of durable polypropylene with a clear, removable release liner, it has a total nominal thickness of between 7 and 9 mils. This fully removable and reusable non-adhesive film is recommended for application to interior and exterior glass (inside surface) as well as plastics and polycarbonate sheets. It is ideal for decorative or architectural applications.

Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

Product Description

SOLYX® SX-SC563 Overlays is a static cling film with a pattern of 15/16" squares of varying textures. It provides obscured visibility and very good light transmission.

Specifications

Product Code	SX-SC563
Product Family	Geometric
Film Type	Polypropylene
Adhesive Type	Non-Adhesive Static Cling
Usage	Interior
Available Width(s)	35"
Thickness	+/-8 mil
IR Transmission	45%
Visible Light Transmission	63%
UV Transmission	17%
Absorption	45%
Total Solar Energy Rejected	56%

Installation and Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

Warranty

This **SOLYX®** product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Construction

Face Film

8 mil Polypropylene

Adhesive

Non-Adhesive Static Cling

Release Liner

Transparent Synthetic

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC
1-888-657-5224

www.decorativefilm.com